


Part No. **MDPX48R902/947S25F**

1. Electrical Specifications.

ITEM	CH1	CH2
Center Frequency (= Fc)	902.5 MHz	947.5 MHz
Pass Band-width (= BW)	Fc ± 12.5 MHz	Fc ± 12.5 MHz
I.L in BW	3.5 dB max.	3.5 dB max.
Ripple in BW	1.5 dB max.	2.0 dB max.
VSWR in BW	1.8 max.	1.8 max.
Attenuation	40 dB min. @ 935~ 960 MHz	45 dB min. @ 890 ~ 915 MHz
In/Out Impedance	50 Ω	
Maximum Power	1 W max.	
Operation Temperature	-40°C ~ +85°C	

2. Dimensions.

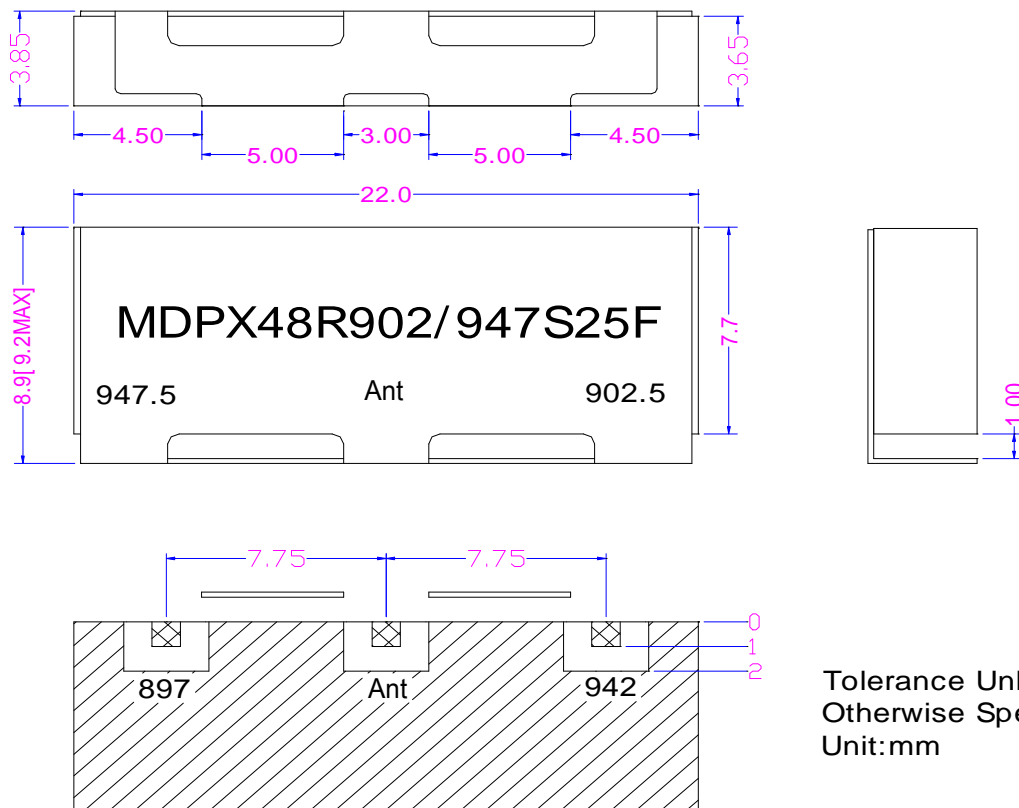

Tolerance Unless
Otherwise Specified ± 0.2
Unit:mm

3. Data.

