


Part No. **MDPX410R830/875SP10C**

1. Electrical Specifications.

ITEM	CH1	CH2
Center Frequency (= Fc)	830 MHz	875 MHz
Pass Band-width (= BW)	Fc ± 5 MHz	Fc ± 5 MHz
I.L in BW	3.5 dB max.	3.0 dB max.
Ripple in BW	1.0 dB max.	1.0 dB max.
VSWR in BW	1.5 max.	1.5 max
Attenuation	45 dB min. @ 870 ~ 880 MHz 5 dB min. @ 821 MHz	57 dB min. @ 825 ~ 835 MHz 28 dB min. @ 905 ~ 915 MHz 5 dB min. @ 885 MHz
In/Out Impedance	50 Ω	
Maximum Power	1 W max.	
Operation Temperature	-40°C ~ +85°C	

2. Dimensions.

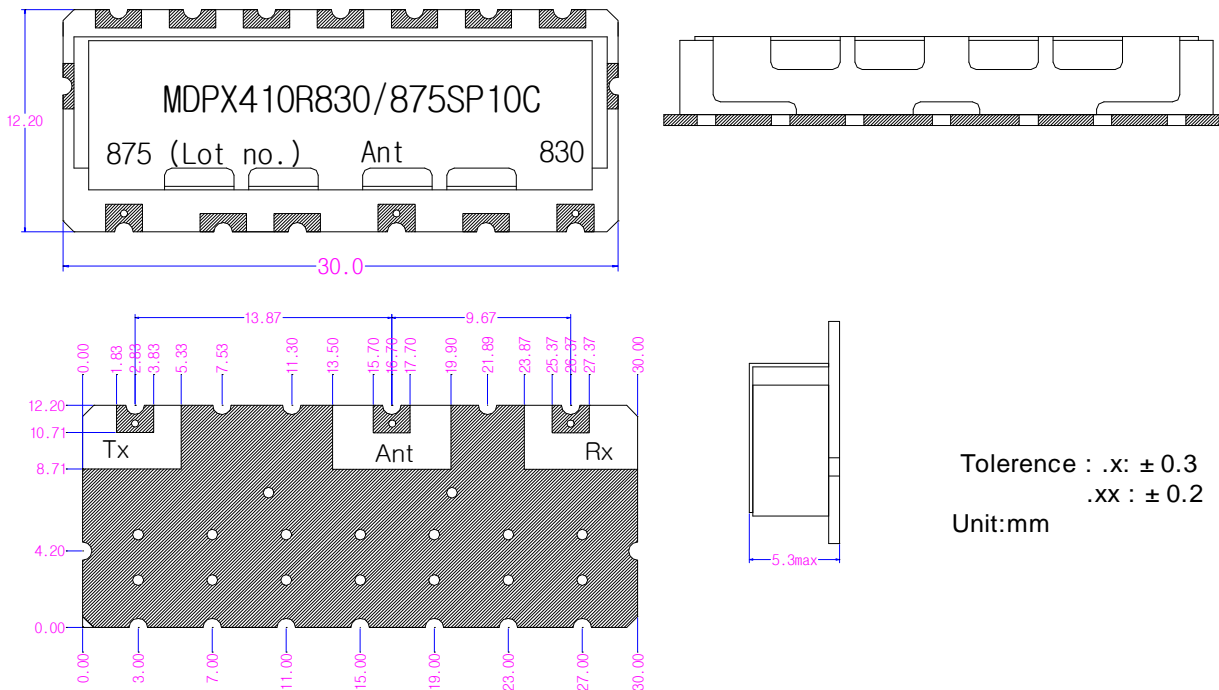

3. Data.

