

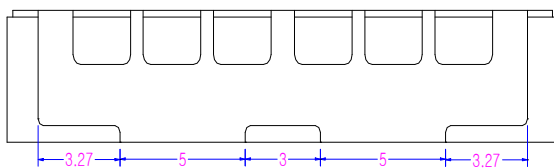
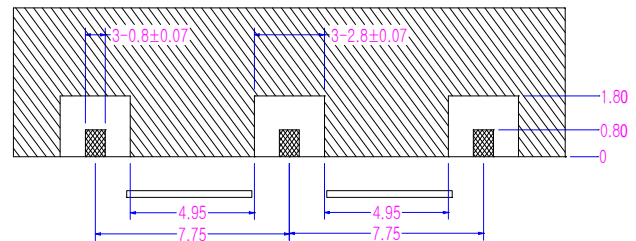


Part No. **MDPX48R3415/3515S30B**

1. Electrical Specifications.

ITEM	CH1	CH2
Center Frequency (= Fc)	3415 MHz	3515 MHz
Pass Band-width (= BW)	$F_c \pm 15$ MHz	$F_c \pm 15$ MHz
I.L in BW	3.0 dB max.	3.0 dB max.
Ripple in BW	1.0 dB max.	1.0 dB max.
VSWR in BW	2.0 max.	2.0 max.
Attenuation	40 dB min. @ 3500 ~ 3530 MHz	40 dB min. @ 3400 ~ 3430 MHz
In/Out Impedance	50 Ω	
Maximum Power	1 W max.	
Operation Temperature	-40°C ~ +85°C	

2. Dimensions.

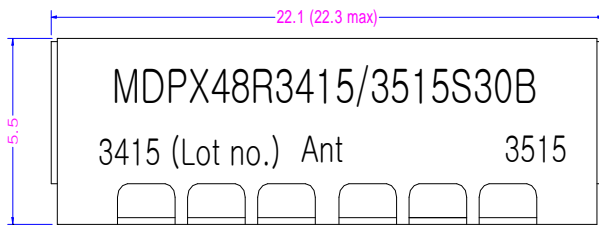

Tolerance Unless Otherwise Specified ± 0.2

Port
 GND

3. Data.

