
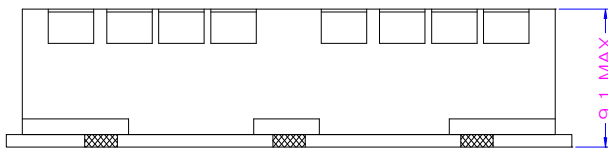
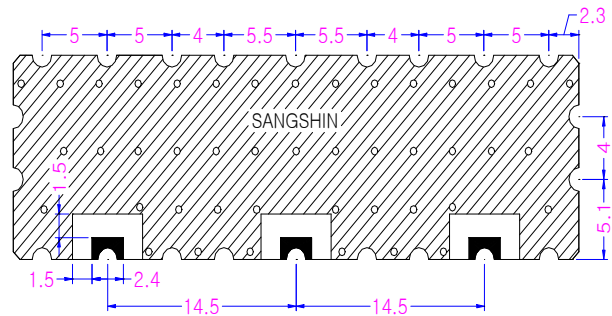


Part No. **MDPX810R1732/2132SP45C**

1. Electrical Specifications.

ITEM	CH1	CH2
Center Frequency (= Fc)	1732.5 MHz	2132.5 MHz
Pass Band-width (= BW)	$F_c \pm 22.5$ MHz	$F_c \pm 22.5$ MHz
I.L in BW	1.5 dB max.	1.5 dB max.
Ripple in BW	0.5 dB max.	0.5 dB max.
Return loss in BW	16 dB min.	16 dB min.
Attenuation	60 dB min. @ 2110 ~ 2155 MHz	60 dB min. @ 1710 ~ 1755 MHz
In/Out Impedance	50 Ω	
Maximum Power	1 W max.	
Operation Temperature	-40°C ~ +85°C	

2. Dimensions.

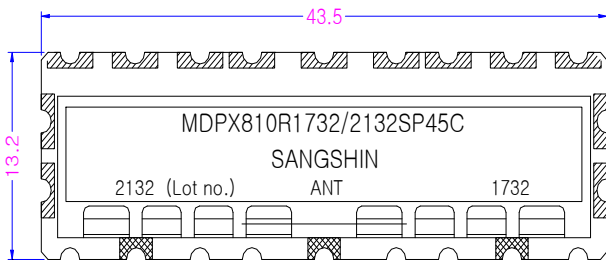


Tolerance Unless Otherwise Specified : ± 0.2

■ : Port


▨ : GND

3. Data.

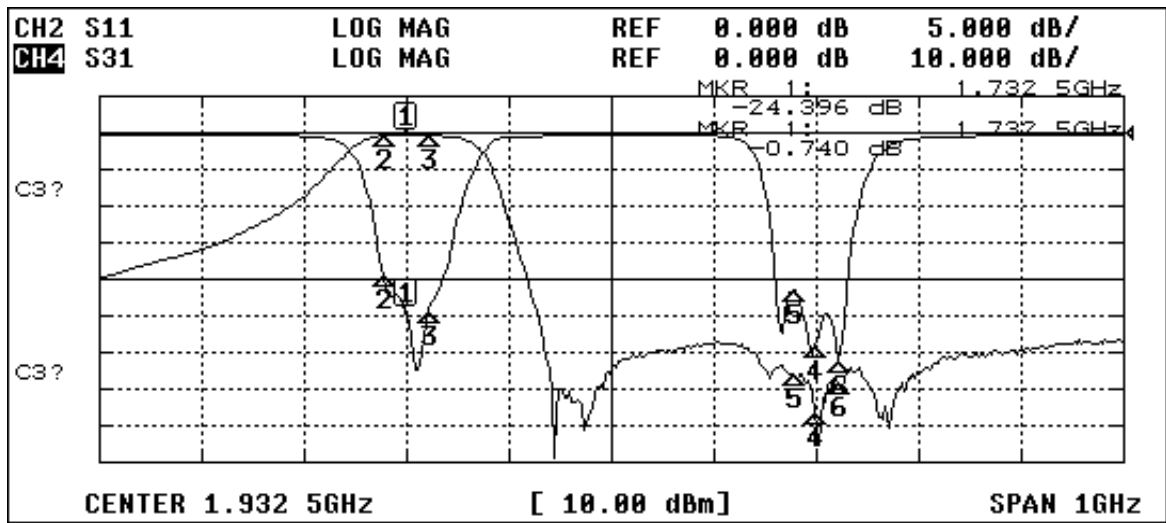

CH4 MARKER LIST

1:	1.732 500GHZ	-0.740 dB
2:	1.710 000GHZ	-0.795 dB
3:	1.755 000GHZ	-0.736 dB
4:	2.132 500GHZ	-76.455 dB
5:	2.110 000GHZ	-65.835 dB
6:	2.155 000GHZ	-67.969 dB

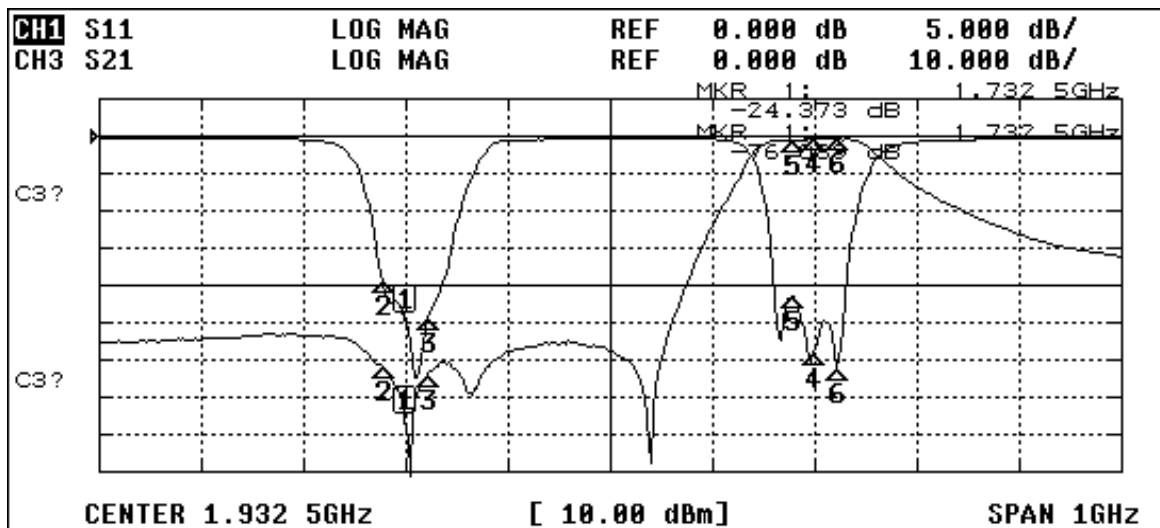

CH3 MARKER LIST

1:	1.732 500GHZ	-76.089 dB
2:	1.710 000GHZ	-61.473 dB
3:	1.755 000GHZ	-63.911 dB
4:	2.132 500GHZ	-0.847 dB
5:	2.110 000GHZ	-0.950 dB
6:	2.155 000GHZ	-0.789 dB