


Part No. TPX1732/1882/2593SA

1. Electrical Specifications.

ITEM	CH1	CH2	CH3
Center Frequency (= Fc)	1732.5 MHz	1882.5 MHz	2593 MHz
Pass Band-width (=BW)	45 (1710 ~ 1755) MHz	65 (1850~ 1915) MHz	194 (2496 ~ 2690) MHz
I.L in BW	3.0 dB max.	3.0 dB max.	3.0 dB max.
Ripple in BW	0.6 dB max.	0.6 dB max.	0.6 dB max.
Retrun Loss in BW	15 dB min.	15 dB min.	15 dB min.
Attenuation	23 dB min. @ DC ~ 1650 MHz	23 dB min. @ DC ~ 1755 MHz	30 dB min. @ DC ~ 2200 MHz
	23 dB min. @ 1850 ~ 2700 MHz	5 dB min. @ 1930 ~ 1995 MHz	15 dB min. @ 2200 ~ 2400 MHz
		23 dB min. @ 1995 ~ 2700 MHz	15 dB min. @ 2800 ~ 3000 MHz
In/Out Impedance	50 Ω		
Maximum Power	2 W max.		
Operation Temperature	-10°C ~ +75°C		



2. Dimensions.

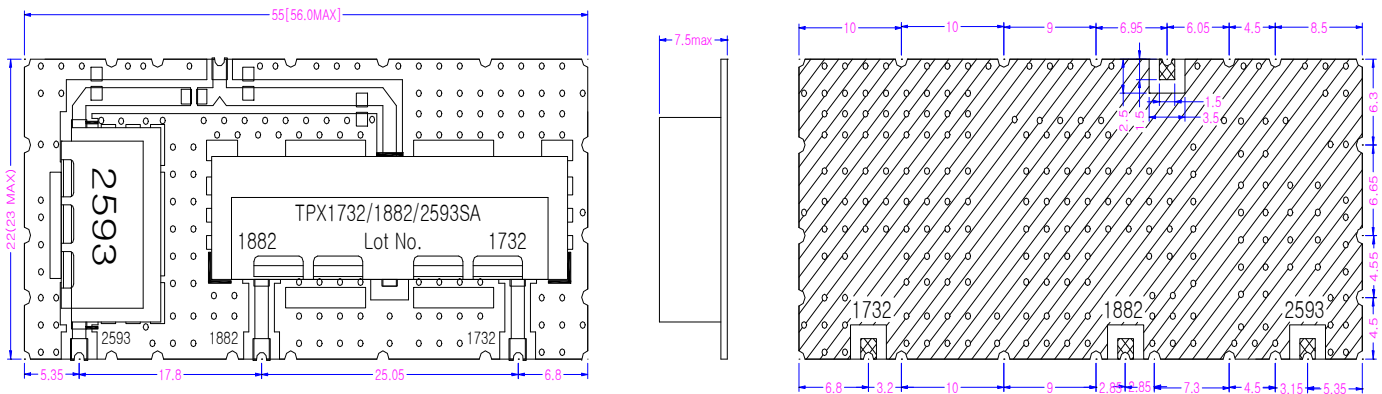


Tolerance unless otherwise specified : +/- 0.2mm

- : GND
- : Port

3. Data.

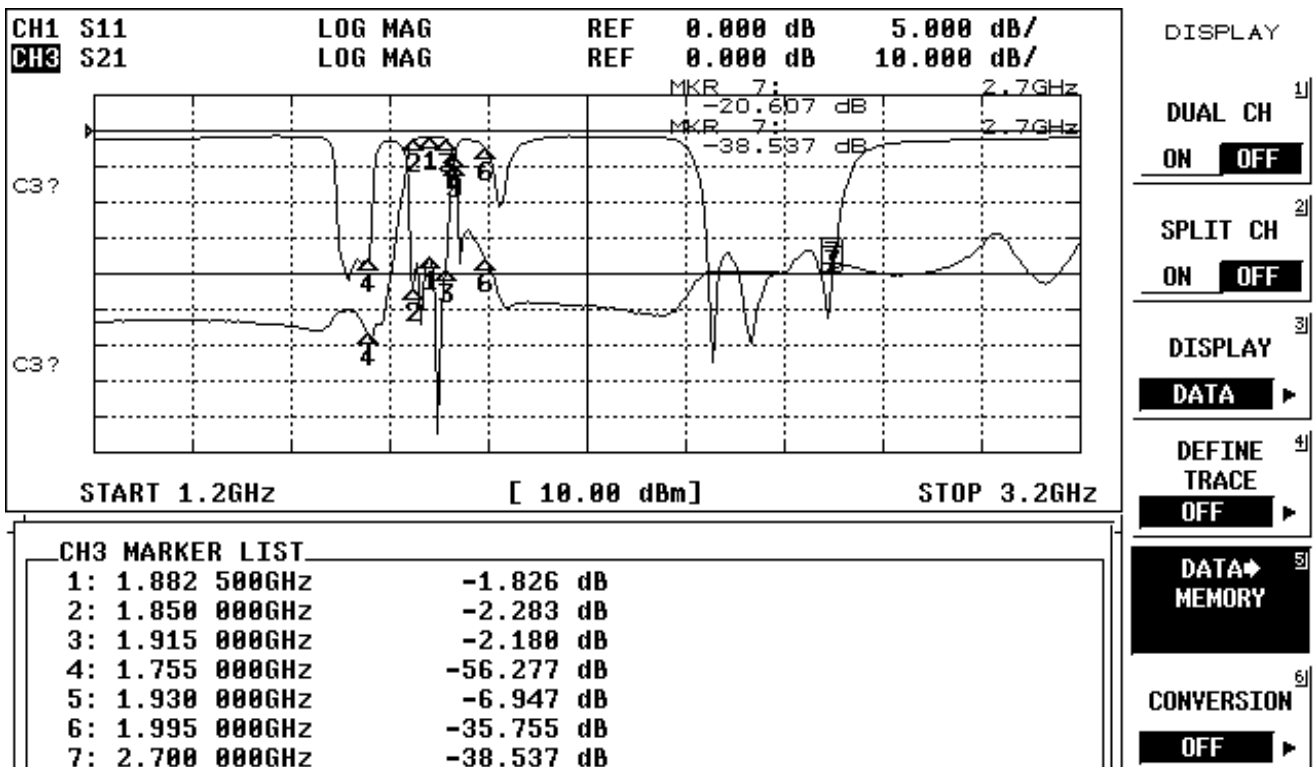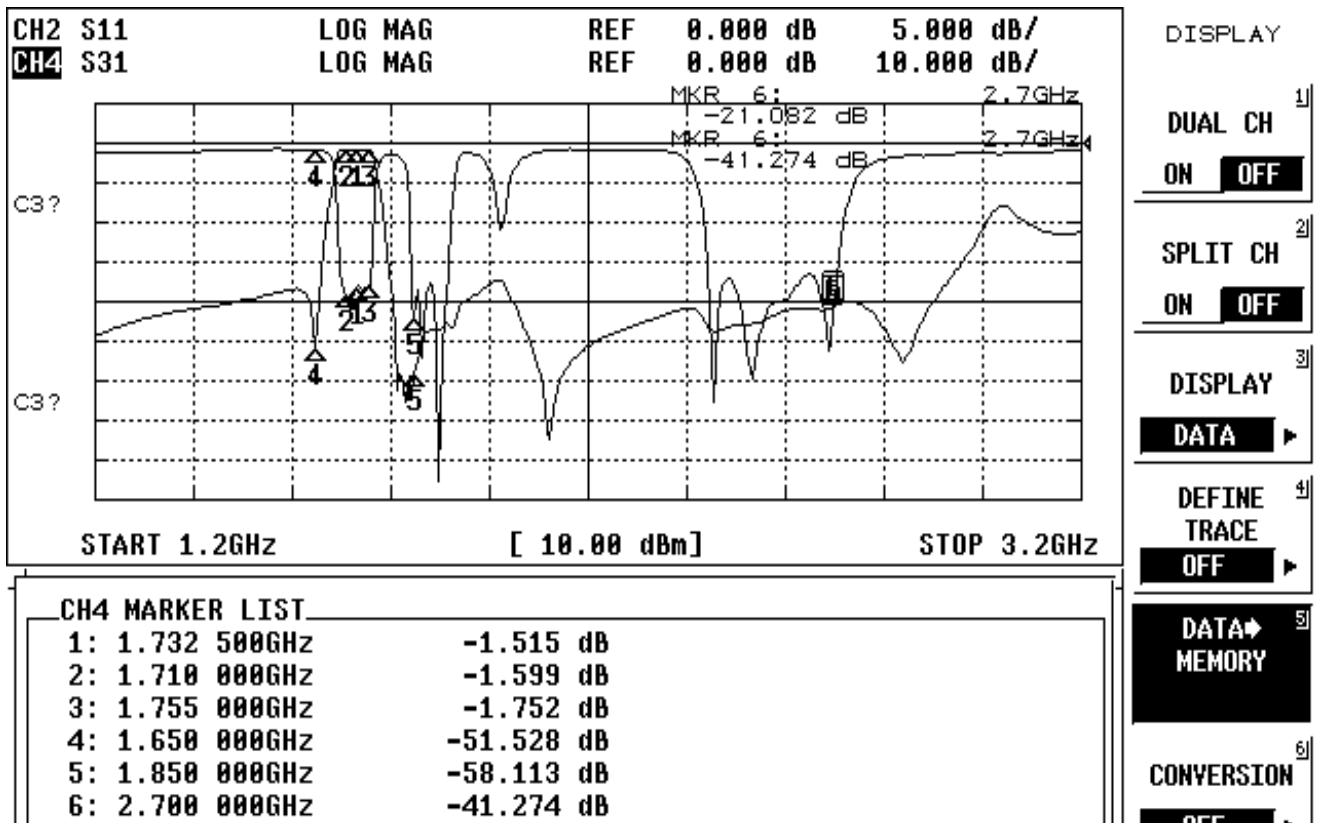

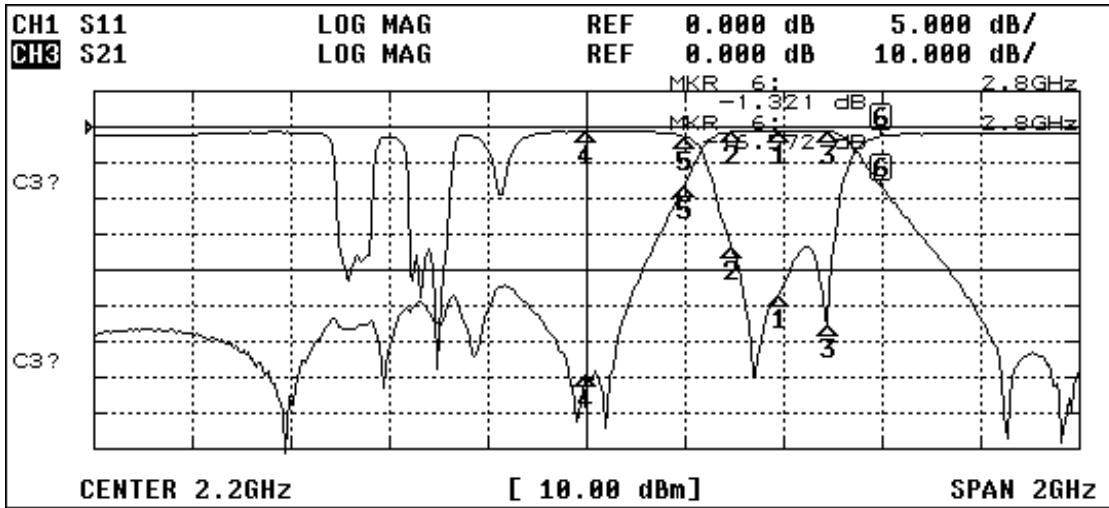

BITMAP FILE
 SAVE TO DISK

COMPRESSION
 ON OFF

TRUNCATE
 ON OFF

CH3 MARKER LIST		
1:	2.593 000GHz	-1.157 dB
2:	2.496 000GHz	-1.459 dB
3:	2.690 000GHz	-1.279 dB
4:	2.200 000GHz	-69.697 dB
5:	2.400 000GHz	-16.244 dB
6:	2.800 000GHz	-16.572 dB