


Part No. **BP44R881S25G**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	881.5 MHz
Pass Band-width (=BW)	25 MHz
I.L in BW	2.5 dB max.
Ripple in BW	0.3 dB max.
V.S.W.R in BW	1.4 max.
Attenuation	10 dB min. @ 849 MHz
In/Out Impedance	50 Ω
Operation Temperature	-30°C ~ +85°C

2. Dimensions.

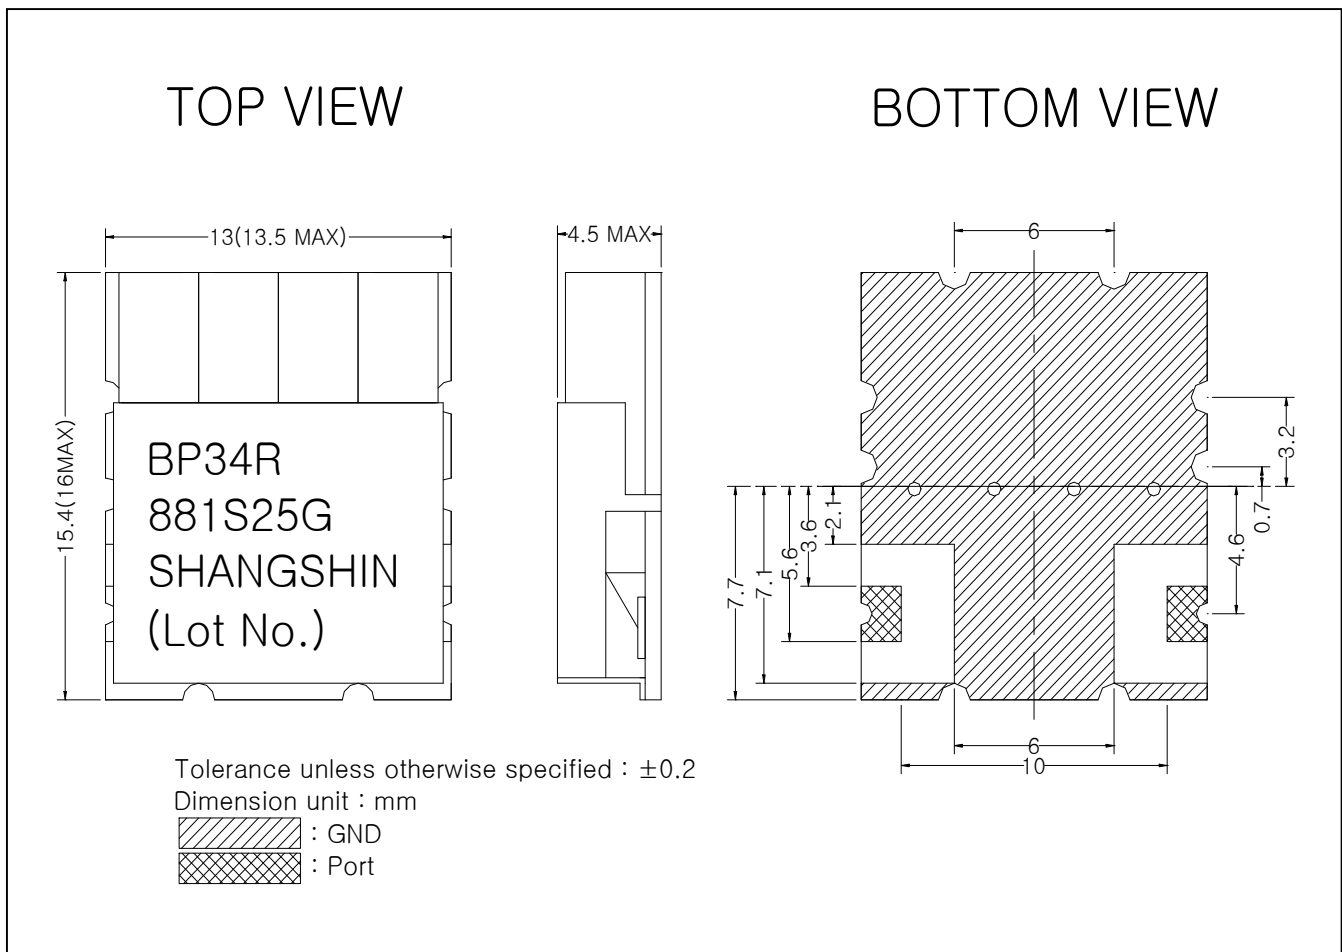

3. Data

