


Part No. BP55R881S65A

1. Electrical Specifications.

| ITEM | Specifications |
|-------------------------|--|
| Center Frequency (= Fc) | 881.5 MHz |
| Pass Band-width (=BW) | 65 MHz |
| I.L in BW | 2.0 dB max. (1.5 dB typ) |
| I.L in 859 ~ 904 MHz | 1.5 dB max. (1.3 dB typ) |
| Ripple in BW | 0.5 dB max. (0.2 dB typ) |
| V.S.W.R in BW | 1.5 max. |
| Attenuation | 40dBc min. (43dBc typ) @ 500 ~ 750 MHz |
| | 40dBc min. (48dBc typ) @ 1000 ~ 1300 MHz |
| | 30dBc min. (65dBc typ) @ 1700 ~ 2200 MHz |
| | 30dBc min. (40dBc typ) @ 3000 ~ 3300 MHz |
| In/Out Impedance | 50 Ω |
| Operation Temperature | -30°C ~ +85°C |

2. Dimensions.

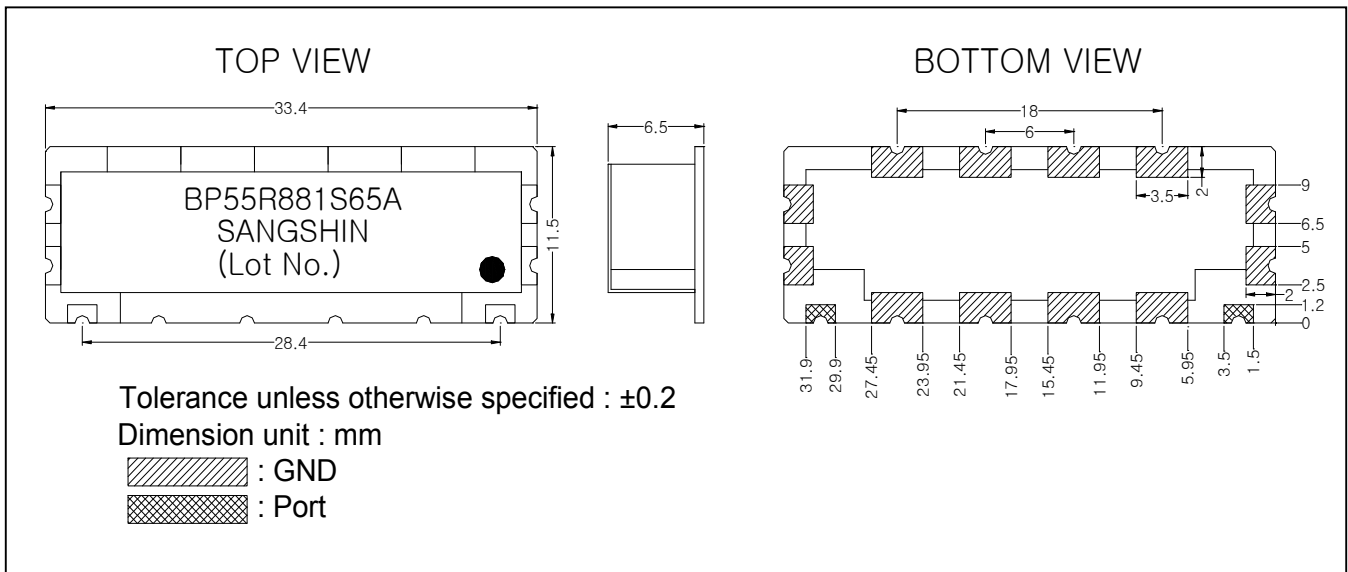

3. Data

