


Part No. **BP56R881S65A**



1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	881.5 MHz
Pass Band-width (=BW)	65 MHz
I.L in BW	2.0 dB max. (1.6 dB Typ)
I.L in 859 ~ 904 MHz	1.5 dB max. (1.3 dB Typ)
Ripple in 859 ~ 904 MHz	0.5 dB max. (0.2 dB Typ)
Return Loss in BW	20 dB min.
Attenuation	40dBc min. (50dBc Typ) @ 500 ~ 750 MHz
	40dBc min. (54dBc Typ) @ 1000 ~ 1300 MHz
	30dBc min. (40dBc Typ) @ 1700 ~ 2200 MHz
In/Out Impedance	50 Ω
Input Power	1 W max.
Operation Temperature	-30°C ~ +85°C

2. Dimensions.

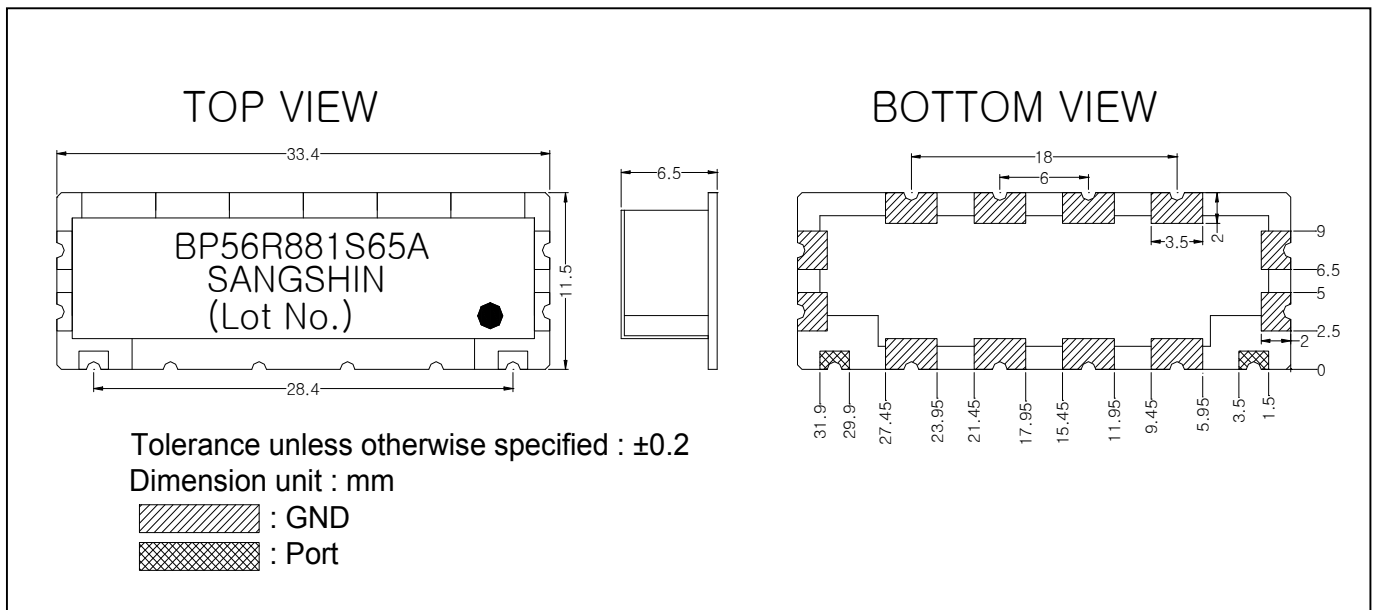

3. Data

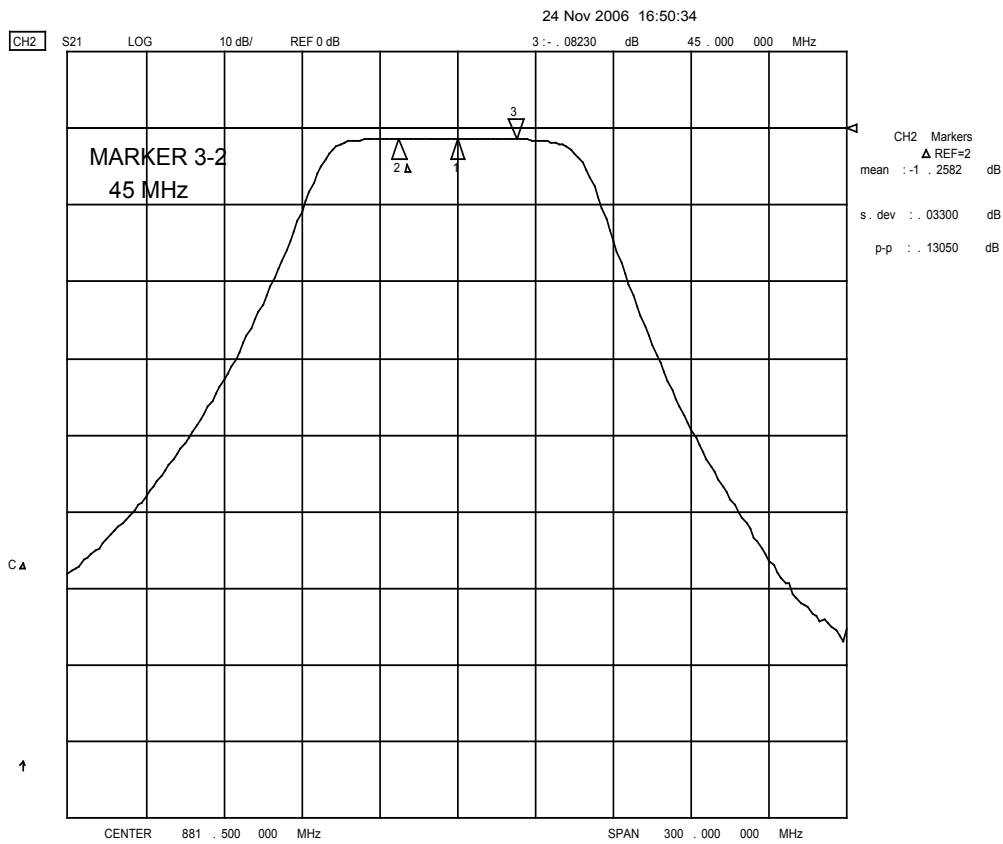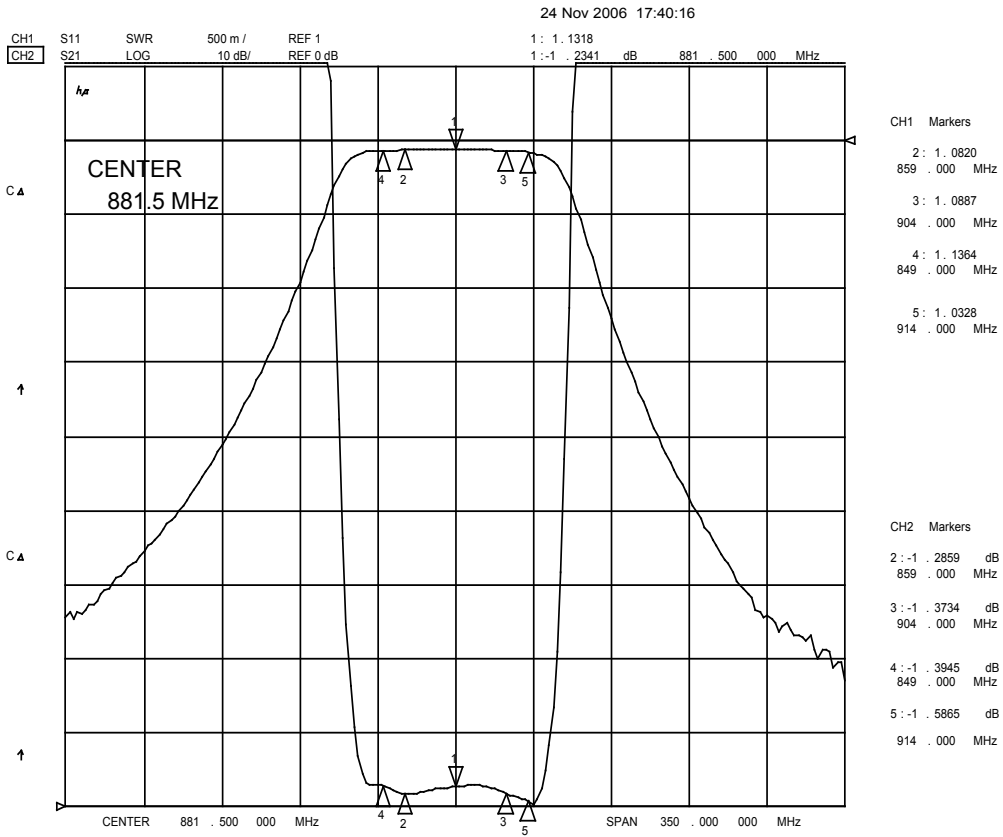

24 Nov 2006 16:52:59

