


Part No. **BP44R2642S25C**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	2642 MHz
Pass Band-width (=BW)	25 MHz
I.L in BW	3.0 dB max.
Ripple in BW	0.1 dB max.
Return Loss in BW	20 dB min.
In/Out Impedance	50 Ω
Input Power	1 W max.
Operation Temperature Range	-30°C ~ +85°C

2. Dimensions.

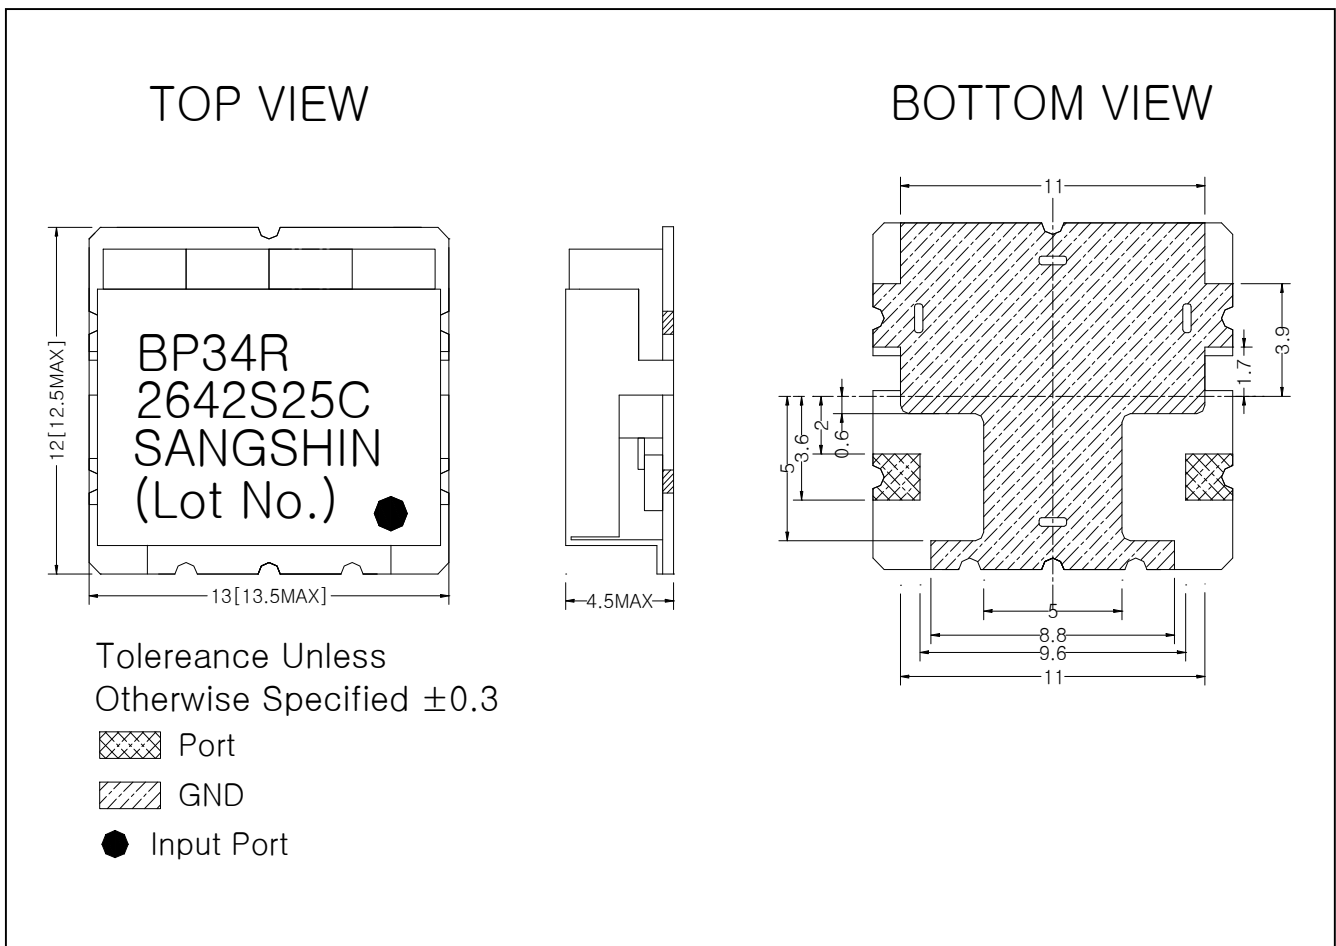

3. Data

