


Part No. **BP33R3257S165A**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	3257.5 MHz
Pass Band-width (=BW)	3175 ~ 3340 MHz
Priority Bandwidth	3175 ~ 3200 MHz
	3315 ~ 3340 MHz
I.L in BW	2.0 dB max.
Ripple in BW	1.0 dB max.
Ripple in Priority Bandwidth	0.4 dB max.
Return Loss in BW	15 dB min.
Attenuation	18 dB min. @ DC ~ 2690 MHz
	18 dB min. @ 3650 ~ 6050 MHz
	25 dB min. @ 6300 ~ 6700 MHz
In/Out Impedance	50 Ω
Operation Temperature	-30°C ~ +85°C

2. Dimensions.

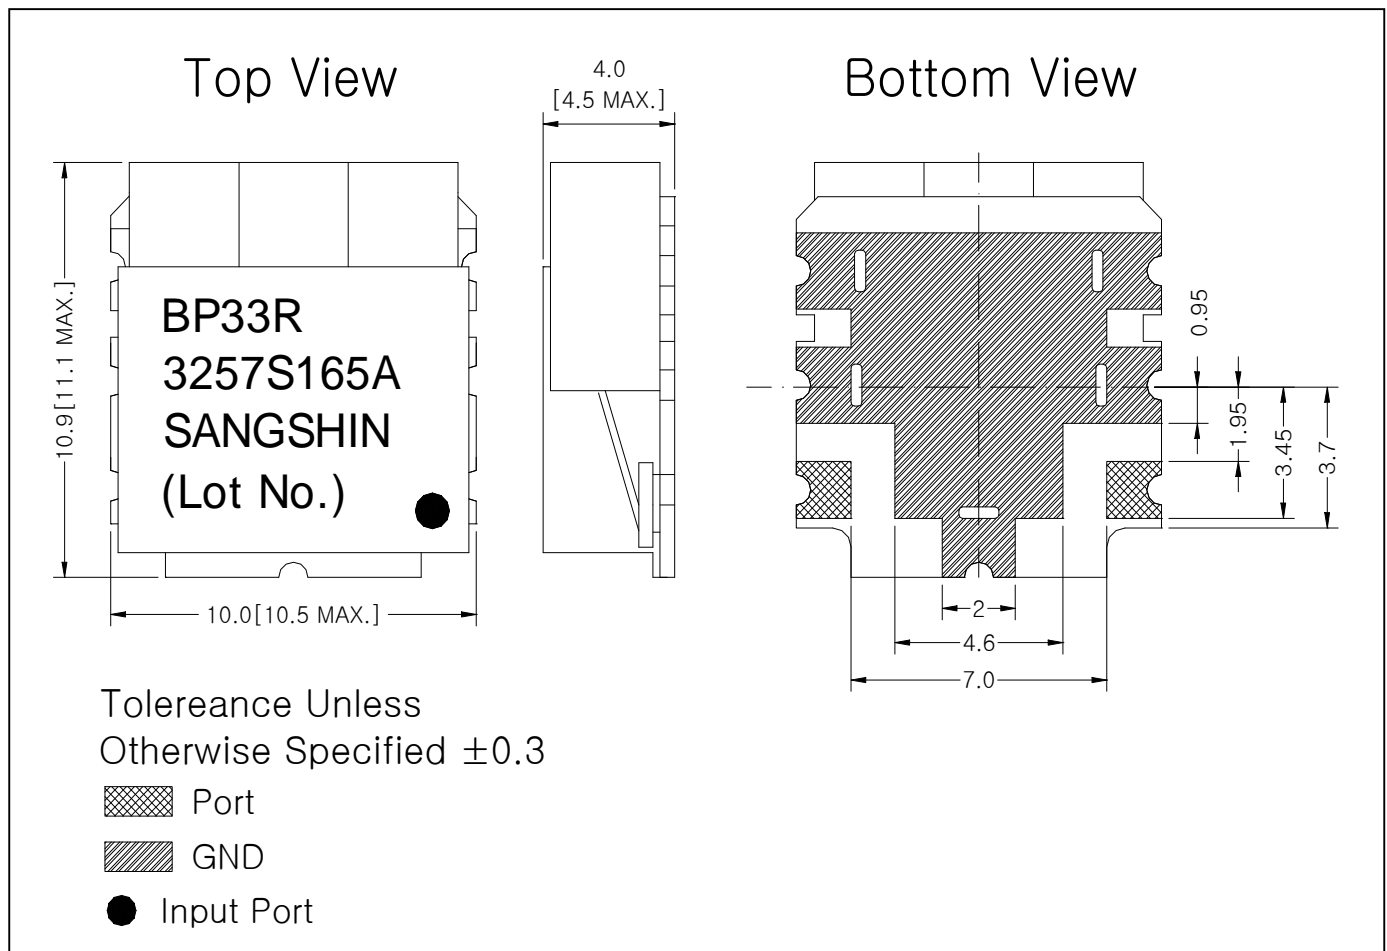

3. Data

