


**Part No.**      **BP33R1960S60B**

## 1. Electrical Specifications.

ITEM	Specifications
Center Frequency ( = Fc )	1960 MHz
Pass Band-width (=BW)	60 MHz
I.L in BW	2.2 dB max.
Ripple in BW	1.0 dB max.
V.S.W.R in BW	2.0 max.
Attenuation	15 dB min. @ Fc ± 100 MHz
	40 dB min. @ Fc ± 400 MHz
In/Out Impedance	50 Ω
Operation Temperature	-30°C ~ +85°C

## 2. Dimensions.

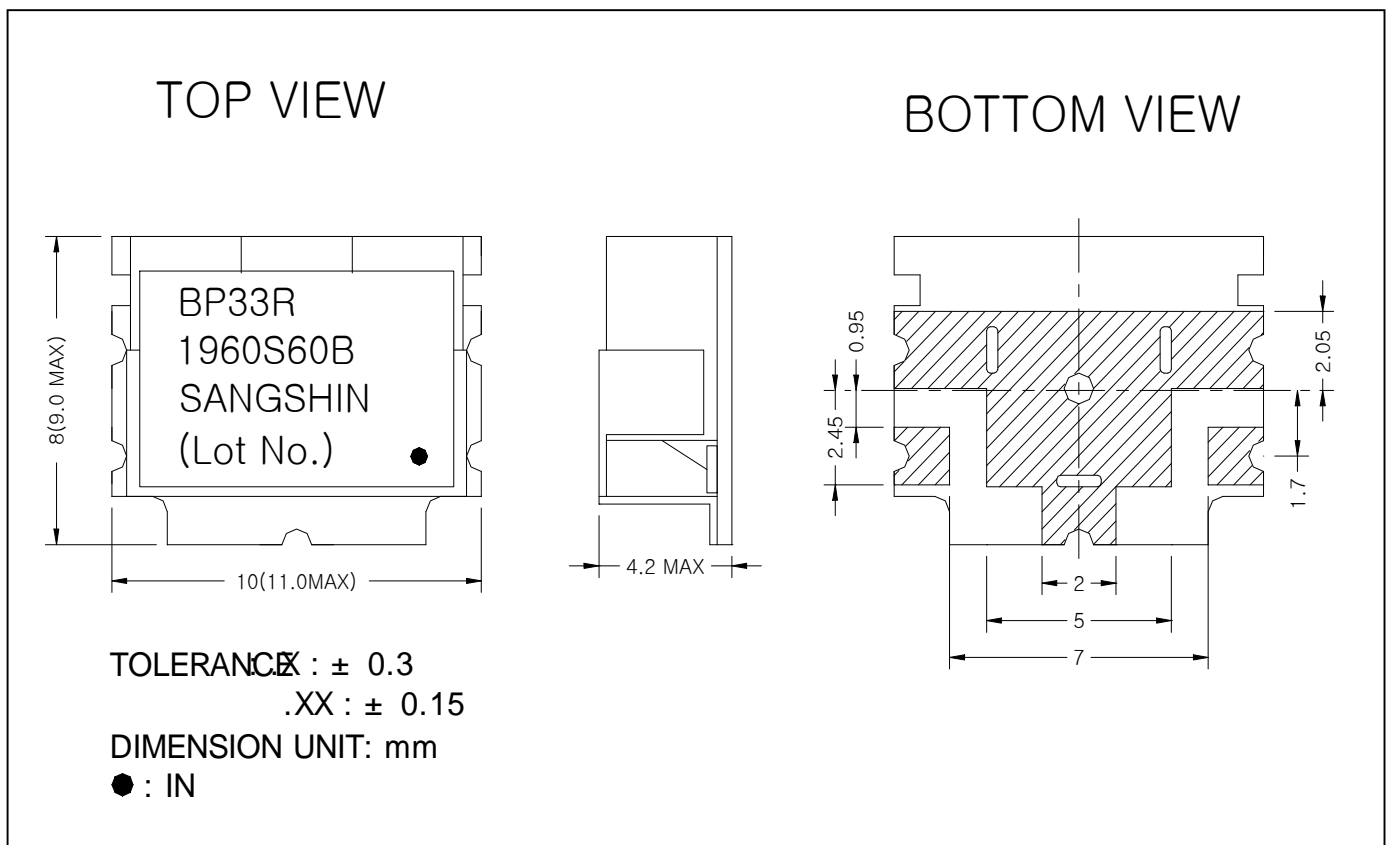

### 3. Data

