


**Part No.**      **BP68R1960S60A**



## 1. Electrical Specifications.

ITEM	Specifications
Center Frequency ( = Fc )	1960 MHz
Pass Band-width (=BW)	60 MHz
I.L in BW	3.0 dB max.
Ripple in BW	0.2 dB max.
V.S.W.R in BW	15 dB min.
Group Delay in BW	7 ± 1 nsec.
Phase Variation in BW	0.2 Deg max.
In/Out Impedance	50 Ω
Operation Temperature	-30°C ~ +85°C

## 2. Dimensions.

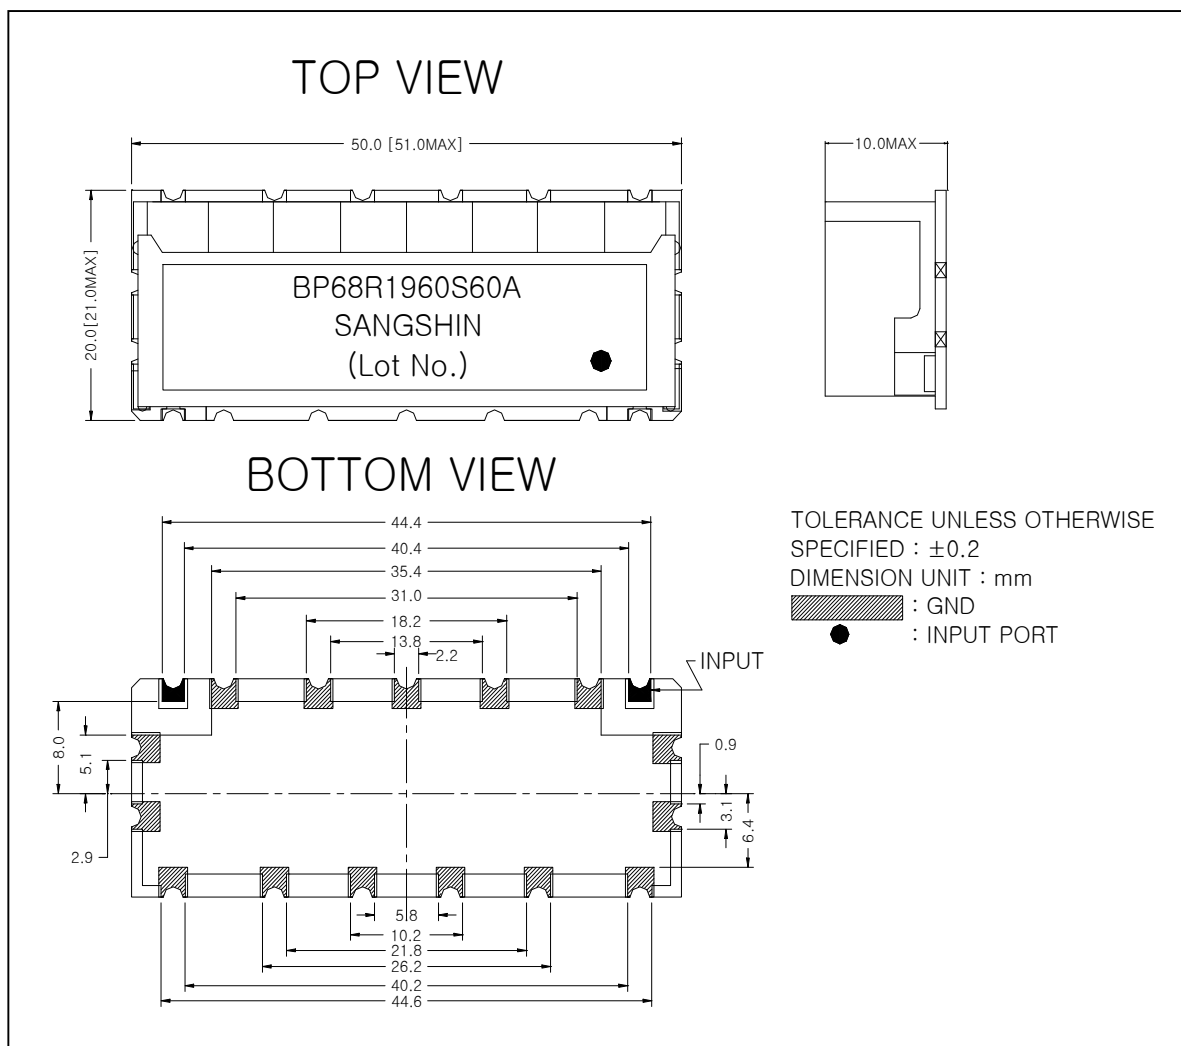


### 3. Data

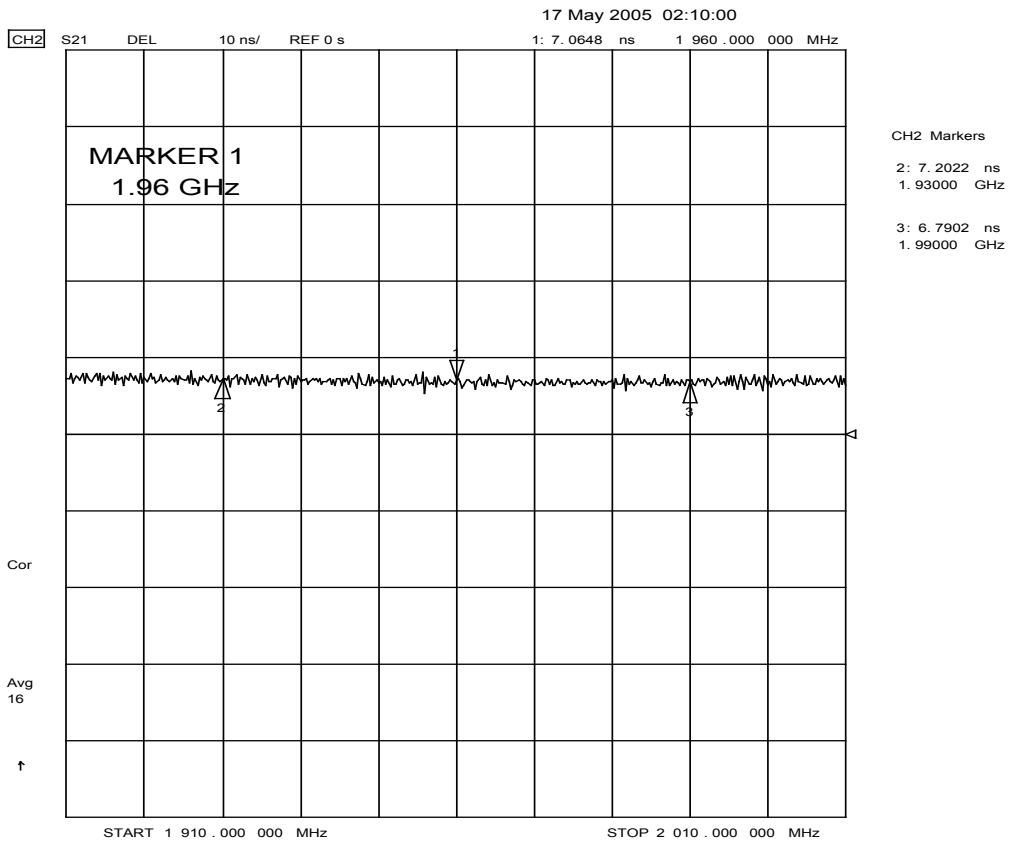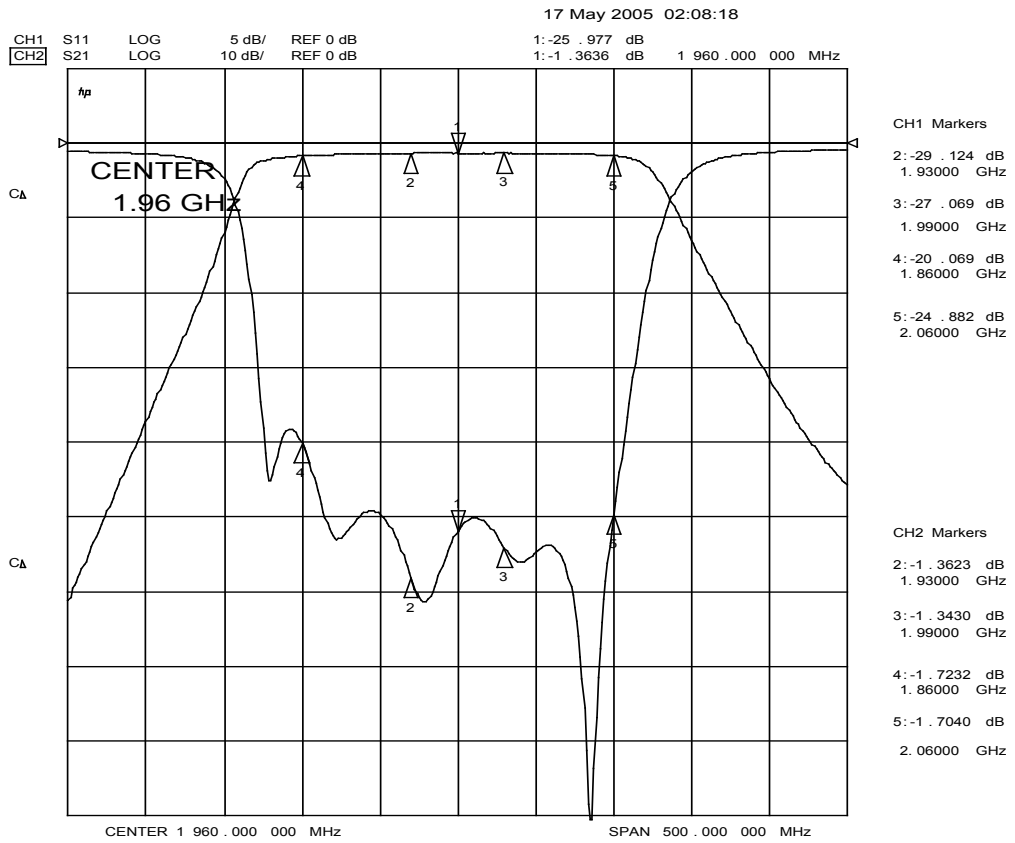

17 May 2005 02:11:23

CH2

S21 PHA 2 REF-77 3 : -1 .3499 60 . 000 000 MHz

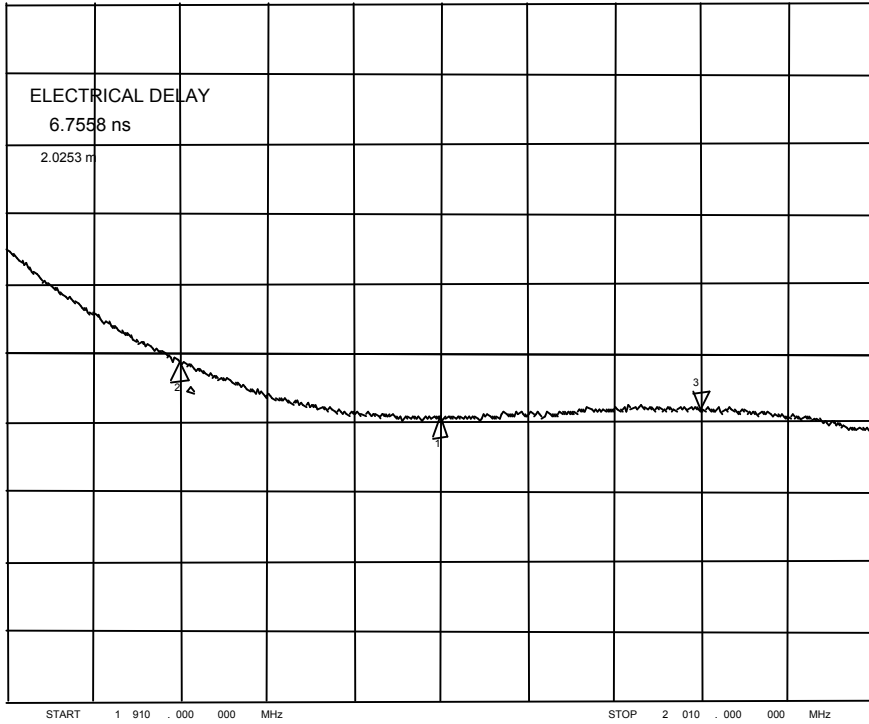

CH2 Markers  
▲ REF=2  
mean : -78 . 551  
s. dev : 398 . 36 m  
p-p : 1. 7070

Del  
Cor

1