


Part No. **BP33R2140S60D**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	2140 MHz
Pass Band-width (=BW)	60 MHz
I.L in BW	1.5 dB max.
Ripple in BW	0.5 dB max.
V.S.W.R in BW	2.0 max.
Attenuation	25 dB min. @ 1310 ~ 1375 MHz
	8 dB min. @ 1710 ~ 1775 MHz
In/Out Impedance	50 Ω
Operation Temperature	-30°C ~ +85°C

2. Dimensions.

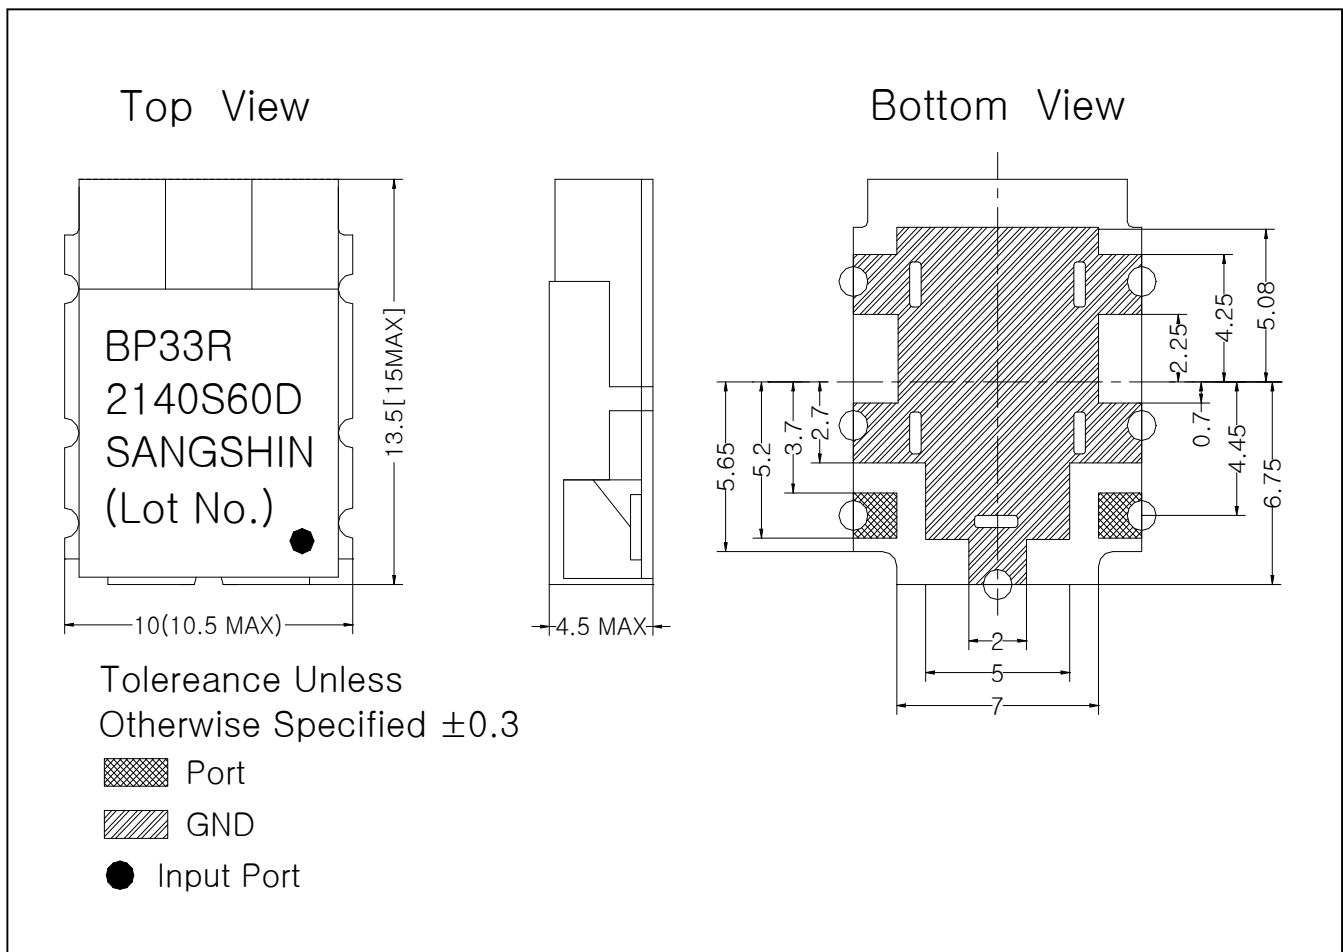

3. Data

