


Part No. **BP44R1950S60K**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	1950 MHz
Pass Band-width (=BW)	60 MHz
I.L in BW	2.5 dB max.
Ripple in BW	1.0 dB max.
V.S.W.R in BW	1.5 dB max.
Attenuation	38 min. @ 2110 MHz
In/Out Impedance	50 Ω
Input Power	1 W max.
Operation Temperature Range	-30°C ~ +85°C

2. Dimensions.

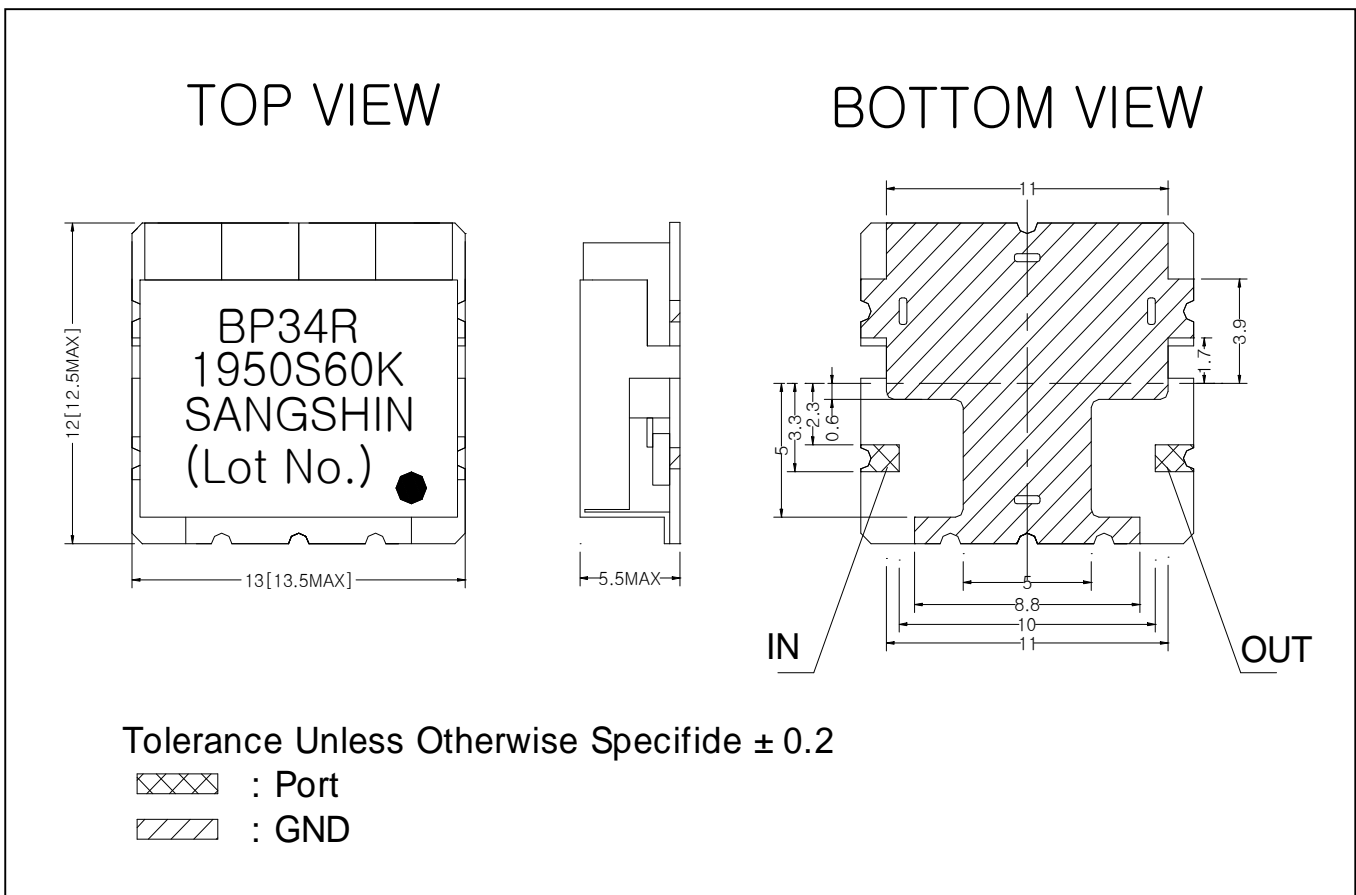

3. Data

