


Part No. **BP44R2140S60L**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	2140 MHz
Pass Band-width (=BW)	60 MHz
I.L in BW	2.5 dB max.
Ripple in BW	0.5 dB max.
Return Loss in BW	18 dB min.
Attenuation	38 dB min. @ 2110 MHz
In/Out Impedance	50 Ω
Input Power	1 W max.
Operation Temperature Range	-30°C ~ +85°C

2. Dimensions.

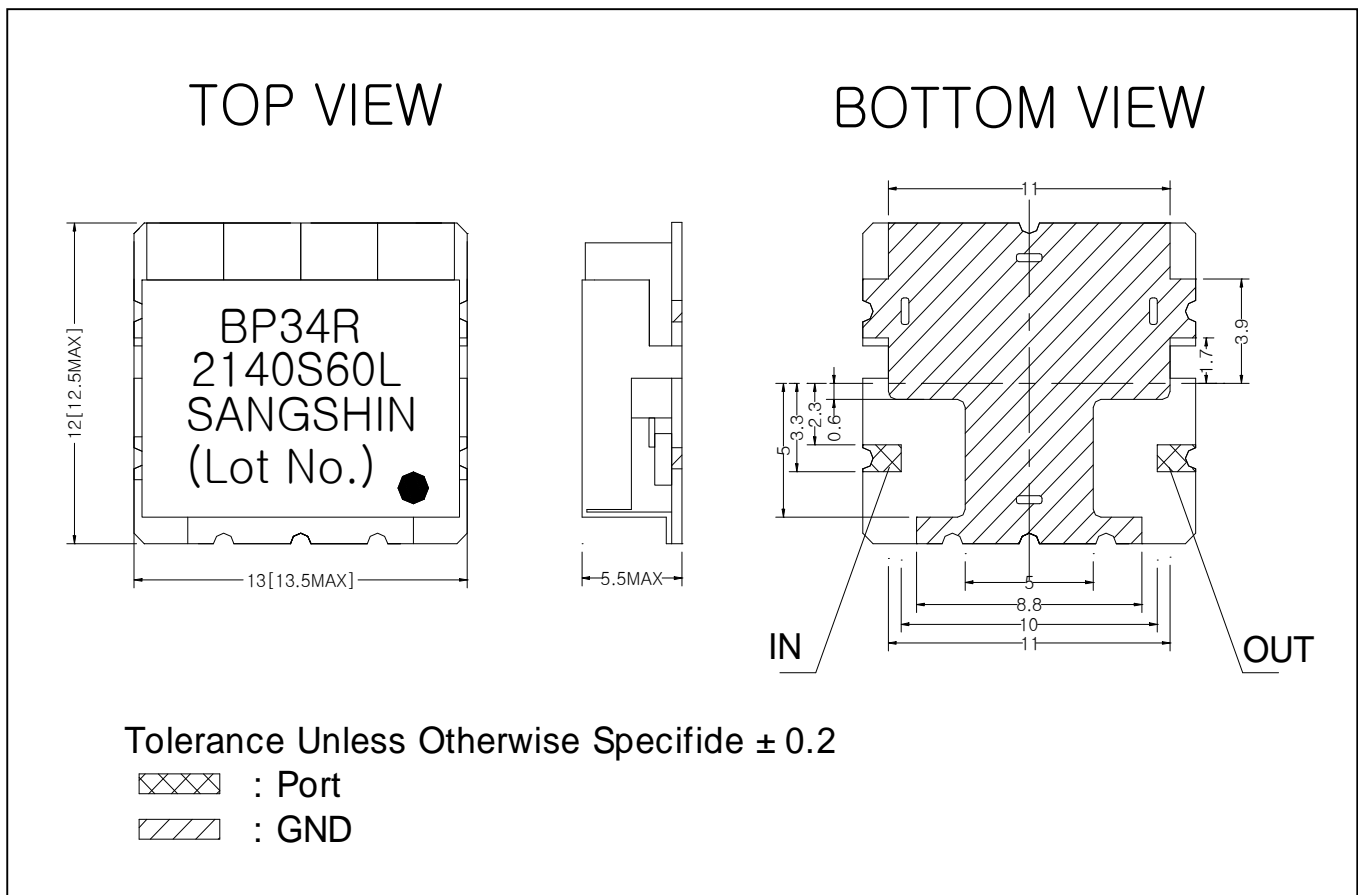

3. Data

