


**Part No.**      **BP45R1950S300A**

## 1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	1950 MHz
Pass Band-width (=BW)	300 MHz
I.L in BW	2.5 dB max.
Ripple in BW	1.0 dB max.
V.S.W.R in BW	15 dB min.
Attenuation	40 dB min. @ 1450 MHz
	40 dB min. @ 2450 MHz
In/Out Impedance	50 Ω
Operation Temperature	-30°C ~ +85°C

## 2. Dimensions.

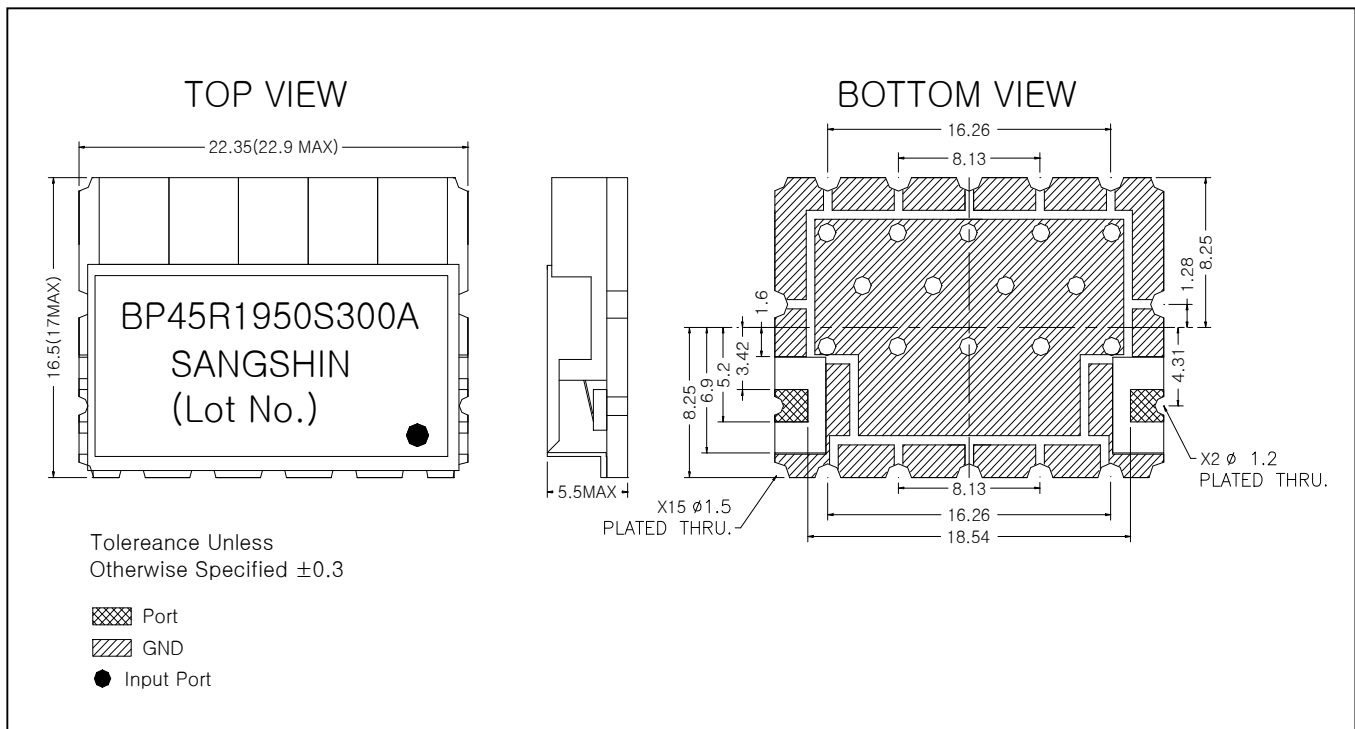

### 3. Data

