


Part No. **BP44R2593S182A**

1. Electrical Specifications.

ITEM	Specifications
Center Frequency (= Fc)	2593 MHz
Pass Band-width (=BW)	182 MHz
I.L in BW	2.0 dB max.
Ripple in BW	2.8 dB max.
V.S.W.R in BW	1.5 max.
Attenuation	70 dB min. @ 1030 ~ 1090 MHz
	15 dB min. @ 2750 ~ 2850 MHz
In/Out Impedance	50 Ω
Input Power	1 W max.
Operation Temperature Range	-30°C ~ +85°C

2. Dimensions.

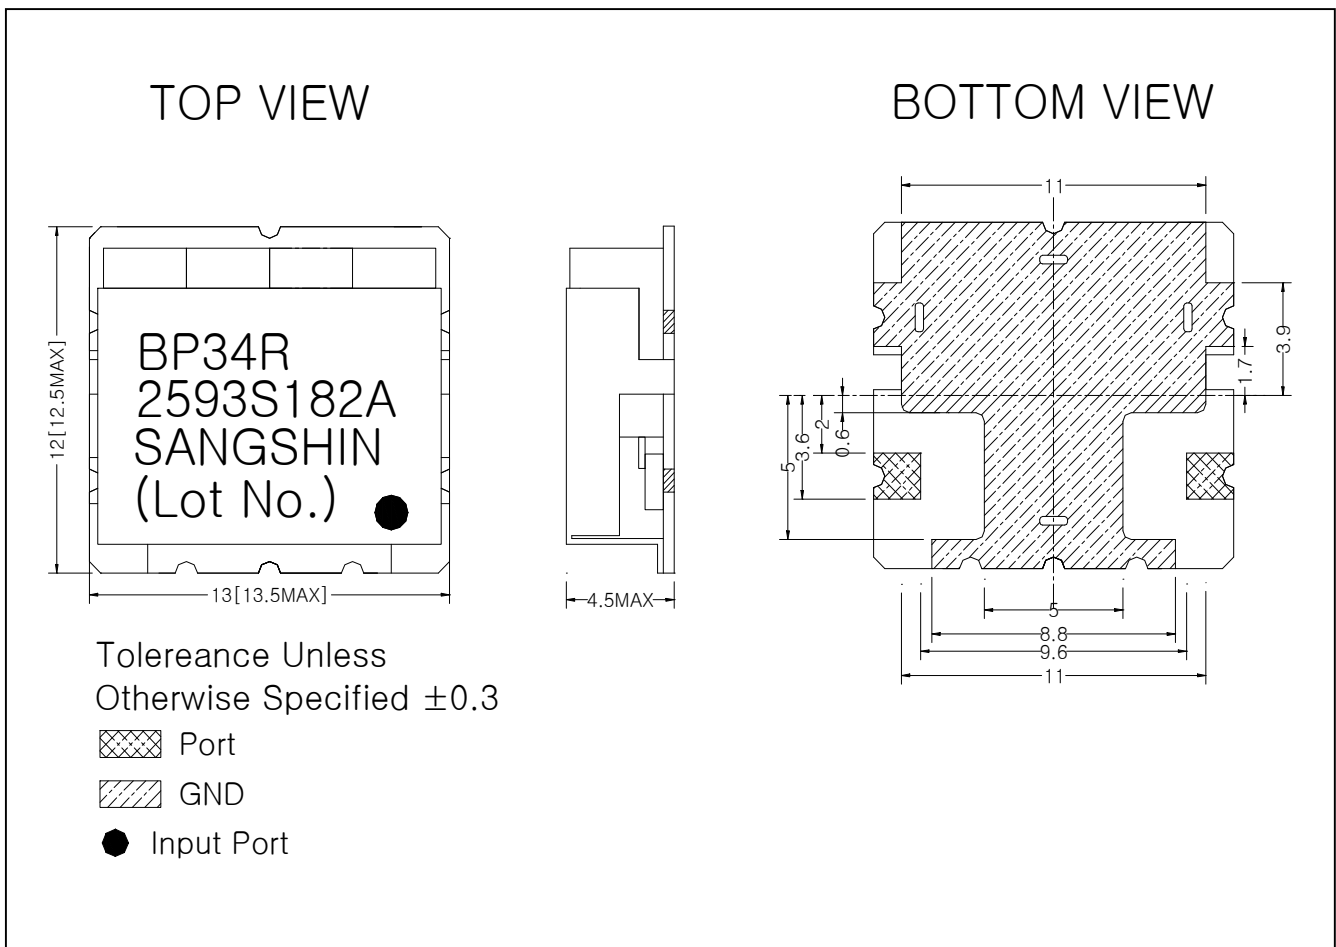

3. Data

